

# How to apply the Cralu roll tag

---


- 1 A Coding Nipper is needed to fasten the Cralu seal. This crimping tool can be supplied with customised embossing dies.




- 2 To load the Coding Nipper, slot the serrated part of the Cralu into the bottom jaw of the mechanism, ensuring the smooth part is at a right angle to it.



- 3 Feed the wire or string through the apertures of the item to be sealed (not shown). Tie a simple knot where the seal should be fastened and place the jaws of the Coding Nipper either side of it.

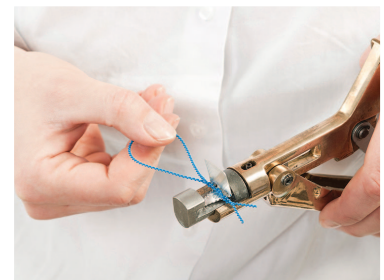

- 4 Squeeze the levers of the Coding Nipper together. This winds the lower, serrated part of the roll tag tightly around the wire or string. If customised dies are used, an initial or logo is simultaneously embossed onto the plain front.

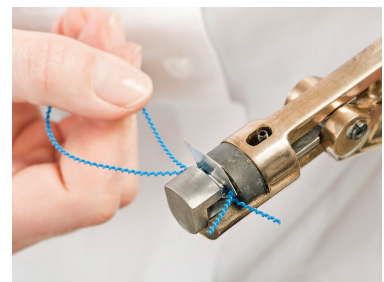

- 5 The seal is now firmly attached to the wire or string. It can only be removed by using a simple cutting tool or wire cutters.

